
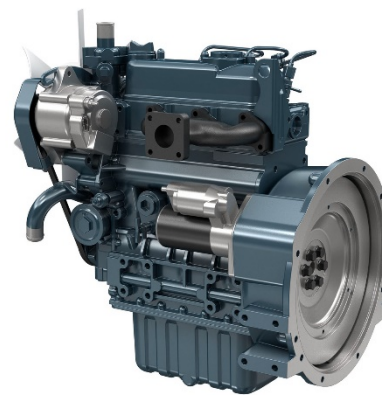


Engine model		D1105-E2-BG
Emission regulation		EPA/CARB Tier 2 level
Type		Vertical, water cooled 4-cycle diesel engine
Cylinders		3
Bore and stroke	mm (in)	78.0 x 78.4 (3.07 x 3.09)
Displacement	L (cu.in)	1.123 (68.53)
Aspiration		Naturally aspirated
Aftertreatment		-
Stand-by output / speed*¹	kW (HP) / rpm	11.5 (15.4) / 1800
Continuous output / speed*²	kW (HP) / rpm	10.1 (13.5) / 1800
Combustion system		Indirect injection
Fuel system		In-line pump
Length x Width x Height*³ (without aftertreatment unit)	mm (in)	516 x 391 x 605 (20.3 x 15.4 x 23.8)
Dry weight	kg (lb)	110 (243)


Specifications are subject to change without notice.
Dimensions and dry weight are according to Kubota's standard specification.
Dimensions and weight depend on completed specifications.

*1: SAE J1349 net stand-by
*2: SAE J1349 net continuous
*3: Exclude cooling fan and exclude aftertreatment unit
*4: Exclude cooling fan and include aftertreatment unit on engine

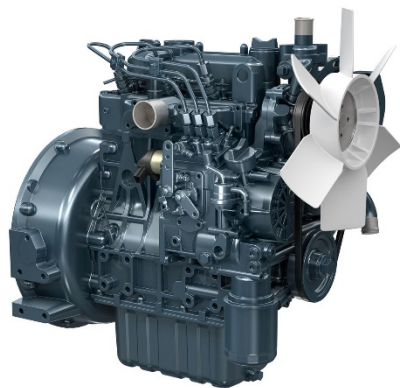

Photographs may show non-standard equipment.

DIMENSIONS

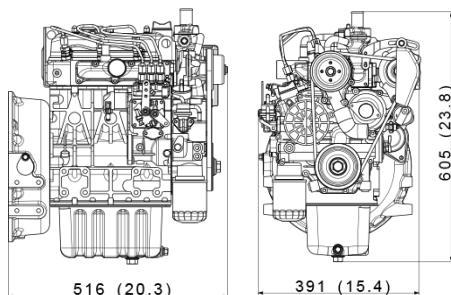

* Dimensions and weight depend on composed specifications.