



**JOHN DEERE**


## ENGINE PERFORMANCE CURVE

Rating: Gross power  
 Application: Generator  
 1500 RPM (50 Hz)

**PowerTech™ 4.5L Engine**  
**Model: 4045TFG20**  
 107 hp 79 kW Prime  
 113 hp 85 kW Standby

Nominal Engine Power @ RPM			
Prime		Standby	
HP	kW	HP	kW
106	79	113	85

Generator Efficiency %	Fan power (% of Standby)		Power Factor	Prime Rating		Standby Rating	
	hp	kW		kWe	kVA	kWe	kVA
92	5.4	4.1	0.8	68	86	74	92

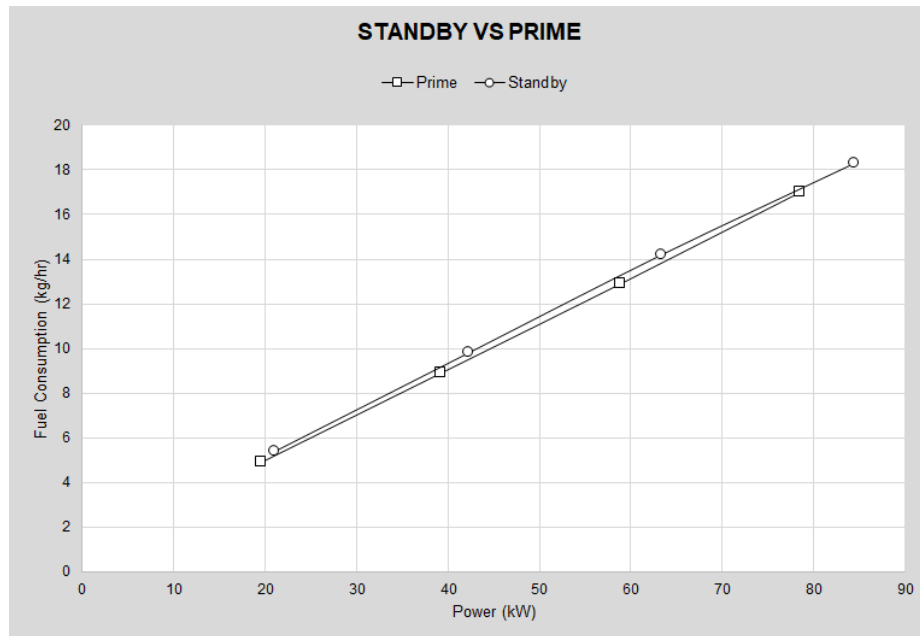

### STANDARD CONDITIONS

Air Intake Restriction	3 kPa
Exhaust Back Pressure	7.5 kPa

**Gross Power Guaranteed within + or - 5% at SAEJ1995 and ISO 3046 conditions:**

Air Inlet Temperature =	25 °C
Barometer =	100 kPa
Fuel Inlet Temperature =	40 °C
Fuel Specific Gravity @ 60 °F (15.5 °C) =	0.853

#### CONVERSION FACTORS:

Power:	kW = HP x 0.746
Fuel:	1 Gal = 7.1 lb, 1 L = 0.85 kg
Torque:	N·m = lb-ft x 1.356

All values are from currently available data and are subject to change without notice.

Notes: 1) This Performance Curve provides installation requirements necessary for the engine to emit at its certified emission levels. For additional information necessary to meet applicable regulatory requirements, refer to the John Deere Emissions-related Installation Instructions (AG01): <https://power.deere.com/wps/myportal/jdps/products/engines/apguidelines>.  
 2) A crankshaft Torsional Vibration Analysis is required on all Gen Set.

Designed/Calibrated to meet:

Certified By:

Non-certified

**PORCHERON A.**

Ref: Engine Emission Label

04-Mach-20

Performance Curve: 4045TFG20\_A15

## Engine Installation Criteria

### General Data

Engine Model	4045TFG20	
Number of Cylinders	4	
Bore	106 mm	4.2 in.
Stroke	127 mm	5.0 in.
Displacement	4.5 L	275 in. <sup>3</sup>
Compression Ratio	17.0:1	
Valves per Cylinder, Intake/Exhaust	1/1	
Firing Order	1-3-4-2	
Combustion System	Direct Injection	
Engine Type	In-line, 4-Cycle	
Aspiration	Turbocharged	
Engine Crankcase Vent System	Open	

### Physical Data

Length	1232 mm	48.8 in.
Width	716 mm	28.3 in.
Height	1048 mm	41.3 in.
Weight, with oil&no coolant (Includes engine, flywheel housing, flywheel&electrics)	595 kg	1311 lb
Center of Gravity Location, X-axis From Rear Face of Block	-0.315 mm	-0.0 in.
Center of Gravity Location, Y-axis Right of Crankshaft	197.68 mm	7.8 in.
Center of Gravity Location, Z-axis Above Crankshaft	285.59 mm	11.2 in.
Max. Allowable Static Bending Moment at Rear Face of Flywheel Housing with 5-G Load	814 N·m	602.4 lb-ft
Thrust Bearing Load Limit Forward, Intermittent	4000 N	899 lb
Thrust Bearing Load Limit Forward, Continuous	2200 N	495 lb
Thrust Bearing Load Limit Rearward, Intermittent	2000 N	450 lb
Thrust Bearing Load Limit Rearward, Continuous	1000 N	225 lb
Max. Continuous Damper Temp	#N/A °F	
Max. Torisonal Vibration, Front of Crank	#N/A DDA	

### Electrical System

Starter Rolling Current, 12V @32 °F (0 °C)	920 amps
Starter Rolling Current, 24V @32 °F (0 °C)	600 amps
Starter Rolling Current, 12V @-22 °F (-30°C)	1300 amps
Starter Rolling Current, 24V @-22 °F (-30°C)	700 amps
Min. Voltage at ECU during Cranking, 12V	#N/A volts
Min. Voltage at ECU during Cranking, 24V	#N/A volts
Max. Allowable Start Circuit Resistance, 12V	0.00120 Ohm
Max. Allowable Start Circuit Resistance, 24V	0.00200 Ohm
Max. Voltage From Engine to Crankshaft, 12V	#N/A volts
Max. Voltage From Engine to Crankshaft, 24V	#N/A volts
Max. ECU Temperature	#N/A °F
Max. Alternator Temperature	#N/A °F
Max. Starter Temperature	#N/A °F
Max. Temperature, All Other Electronics	#N/A °F

### Charge Air Cooling System

Air-to-Air Heat Rejection	#N/A kW	#N/A BTU/min
Compressor Discharge Temperature @ 77°F(25°C) Ambient Air	131 °C	267.8 °F
Intake Manifold Pressure	120 kPa	17.4 psi
Max. Temperature Out of Charge Air Cooler @ All Ambient Conditions	#N/A °C	#N/A °F
Max. Pressure Drop through CAC	#N/A kPa	#N/A in. H <sub>2</sub> O
Max. Temperature Out of Charge Air Cooler 77°F (25°C) Ambient Air	#N/A °C	#N/A °F

### Cooling System

Engine Heat Rejection	41.4 kW	2354.4 BTU/min
Coolant Flow @ 10 kPa External Restriction	108 L/min	28.5 gal/min
Thermostat Start to Open	82 °C	179.6 °F
Thermostat Fully Open	94 °C	201.2 °F
Engine Coolant Capacity	9 Liter	9.0 quart
Min. Coolant Fill Rate	11 L/min	2.9 gal/min
Min. Pump Inlet Pressure @ 203°F (95°C) Coolant	30 kPa	4.4 psi
Max. External Coolant Restriction	#N/A kPa	#N/A psi
Max. Top Tank Temperature	105 °C	221.0 °F
Max. Top Tank temperature 95% of Operating Hours	#N/A °C	#N/A °F
Min. Air-to-Boil Temperature	41.7 °C	107 °F

Performance Curve: 4045TFG20

## Engine Installation Criteria

### Exhaust System

Exhaust Flow	15.8 m <sup>3</sup> /min	558 ft <sup>3</sup> /min
Exhaust Temperature	590 °C	1094 °F
Max. Allowable Exhaust Restriction	7.5 kPa	30 in. H <sub>2</sub> O
Max. Bending Moment on Turbo Outlet	7.0 N·m	5.2 lb-ft
Max. Shear on Turbine Outlet	11.0 kg	24.3 lb

### Fuel System

ECU Description	N/A	
Fuel Injection Pump	Delphi DP100G	
Governor Type	Mechanical	
Total Fuel Flow	#N/A kg/hr	#N/A lb/hr
Fuel Consumption, Prime	17 kg/hr	37 lb/hr
Fuel Temperature Rise, Inlet to Return	12.3 Δ°C	53.6 Δ°F
Min. Fuel Inlet Pressure	-30 kPa	-121 in. H <sub>2</sub> O
Max. Fuel Inlet Pressure	69 kPa	277 in. H <sub>2</sub> O
Max. Fuel Return Pressure	10 kPa	40 in. H <sub>2</sub> O
Min. Fuel Return Pressure	kPa	0 in. H <sub>2</sub> O
Max. Fuel Inlet Temperature	85 °C	185 °F
Fuel Filter @98% Efficiency	#N/A mic	

### Lubrication System

Oil Pressure at Rated Speed	315 kPa	46 psi
Max. Crankcase Pressure	1 kPa	2 in. H <sub>2</sub> O

### Air Intake System

Engine Air Flow	5.5 m <sup>3</sup> /min	194 ft. <sup>3</sup> /min
Air Mass Flow	375 kg/hr	827 lb/hr
Maximum Allowable Temperature Rise, Ambient Air to Engine Inlet	8 Δ°C	15 Δ°F
Max. Air Intake Restriction, Clean Air Clearer	3.75 kPa	15 in. H <sub>2</sub> O
Max. Air Intake Restriction, Dirty Air Clearer	6.25 kPa	25 in. H <sub>2</sub> O
Air Cleaner Efficiency	99.9 %	

### Performance Data

Rated Power, Prime	79 kW	106 HP
Rated Power, Standby	85 kW	113 HP
Rated Speed	1500 rpm	
Low Idle Speed	#N/A rpm	
Rated Torque, Prime	492 N·m	363 lb-ft
Rated Torque, Standby	536 N·m	395 lb-ft
BMEP, Prime	1380 kPa	200 psi
BMEP, Standby	1510 kPa	219 psi
Altitude Capability, Prime	2286 m	7500 ft
Altitude Capability, Standby	1524 m	5000 ft
Friction Power @Rated Speed	13.0 kW	17 HP
Air: Fuel Ratio, Prime	20.4 : 1	
Air: Fuel Ratio, Standby	21.5 : 1	
Noise @1 m Prime	#N/A dB(A)	
Noise @1 m Standby	#N/A dB(A)	
0-100% Standby Load Acceptance	#N/A sec	
Load Acceptance, ISO 8528-5	#N/A	

Fuel Consumption	Prime		Standby	
	kg/h	lb/hr	kg/h	lb/hr
25 % Power	4.9	10.8	5.4	11.9
50 % Power	8.9	19.6	9.8	21.6
75 % Power	12.9	28.4	14.2	31.3
100 % Power	17.0	37.5	18.3	40.3

Performance Curve: 4045TFG20